



产品目录册

Product Catalogue



DELISH AUTOMATION EQUIPMENT CO.,LTD
厦门德力实自动化设备有限公司

Brief Introduction

■ 公司简介

DELISH AUTOMATION EQUIPMENT CO.,LTD 厦门德力实自动化设备有限公司

Xiamen Delish Automation Equipment Co., Ltd is the professional producer of TTR slitting machines, hot stamping foil slitting machines and the other small helping equipment in China. Starting from 2000, basing on the experience of slitting factory, we have developed our 1st generation of TTR slitter and we are keeping to improve and innovate our machines. After years of development, currently we have full series of TTR slitter in Manual Leader/ Semi auto Leader /Auto Leader. All these make up our machines in very different composition to suit for different slitting work needs like fax film, barcode film, coding foil and HSP foil. Now Delish TTR slitter is with automatic digital tension control system, which makes machine easier to control for users. For the electrical element, we use international well-known brand to ensure the quality and stability of machine.

Since we were starting our machine development in TTR slitting factory, we are more professional in slitting work design. We have standard composition for new start factory, we are also design machine basing on special requirements from customers. All these makes our machines get approval by our users from all over the world. We promise that "Changing to Meet Change; Professional Design and Customized Production." will be our goal forever.

厦门德力实自动化设备有限公司，是国内专业设计制造热转印色带（条码碳带，传真色带，打码带）和烫金箔分切机及其他相关小型机器的厂家。从2000年开始，公司借鉴多年分切工厂的经验，自主研发，开发出第一代专业的高速热转印碳带薄膜分切机，并在近几年不断创新改进。经过多年的发展，公司已经开发出手动，半自动和全自动等分切机系列，适合不同客户的不同分切需求。目前新一代的分切机，采用全自动电脑张力控制系统，操作简单，维修方便。产品主要元器件均采用国际知名品牌，以确保机器工作的稳定性和可靠的售后服务。

我们公司起始于分切工厂，有着可靠的分切机设计制造经验，更有丰富的使用经验和可靠的技术服务，对于新的分切工厂我们有标准的设备配置可供选择，同时亦可根据客户的具体要求进行设计制造。随着公司规模和专业工作团队的扩大，德力实分切机已经得到广大用户的品质认可，目前我们已同国内外专业的碳带生产商紧密合作，我们承诺“以改变，应万变；专业设计，定制生产”将是我们不变的目标。

Contents//目录

MANUAL TTR SLITTER RSDS2 手动薄板碳带分切机·····	1
SEMI-AUTO TTR SLITTER RSDS2 PLUS 半自动碳带分切机/省色带功能·····	2
MANUAL TTR SLITTER RSDS4 手动厚板碳带分切机·····	3
SEMI-AUTO TTR SLITTER RSDS5 PLUS 半自动碳带分切机/省色带功能·····	4
AUTOMATIC TTR SLITTER RSDS6 PLUS 全自动碳带分切机/省色带功能·····	5
AUTOMATIC TTR SLITTER RSDS8 PLUS 全自动碳带分切机/省色带功能·····	6
MINI SLITTER 250MM 迷你分切机250·····	7
MINI SLITTER 350MM 迷你分切机350·····	8
MINI SLITTER 450MM 迷你分切机450·····	9
MINI SLITTER 450SMM 迷你分切机450S·····	10
AUTO CORE CUTTER 全自动切管机·····	11
MANUAL CORE CUTTER 手动切管机·····	12
PAPER CORE NOTCH PUNCHER 冲孔机·····	12
CORE LOADING MACHINE 装管机·····	13
MINI TROLLEY 迷你叉车·····	13



DESCRIPTION详细描述:

JUMBO ROLL WIDTH 650mm~1010mm

大卷宽度650mm~1010mm

JUMBO ROLL DIAMETER 630mm in max.

大卷最大直径630mm

JUMBO ROLL CORE DIA 6inch/3inch

大卷纸芯内径6英寸或3英寸

MAX. SPEED 250m/min

最大速度250m/min

FILM THICKNESS 4~20um

适合薄膜厚度4~20um

FINISHED ROLL SIZE 1inch/ 1/2inch

成品规格一英寸/半英寸纸芯

FINISHED ROLL DIA 120mm(in around 1400m length)

成品最大外径120mm(碳带长度约1400m)

MANUAL LEADER TABLE

手动带头架

BLADE HOLDER QTY. 25sets

刀座标配25把

POWER Three Phase 380V/220V , 50~60Hz

电源 三相380V/220V , 50~60Hz

MAIN ENGINE POWER 5KW

功率5KW

AIR PRESSURE 0.6~0.8MPa

气压0.6~0.8MPa

MACHINE SIZE 2200*1950*1660mm

尺寸2200*1950*1660mm



DESCRIPTION详细描述:

JUMBO ROLL WIDTH 650mm~1010mm

大卷宽度650mm~1010mm

JUMBO ROLL DIAMETER 630mm in max.

大卷最大直径630mm

JUMBO ROLL CORE DIA 6inch/3inch

大卷纸芯内径6英寸或3英寸

MAX. SPEED 250m/min

最大速度250m/min

FILM THICKNESS 4~20um

适合薄膜厚度4~20um

FINISHED ROLL SIZE 1inch/ 1/2inch

成品规格一英寸/半英寸纸芯

FINISHED ROLL DIA 120mm(in around 1400m length)

成品最大外径120mm(碳带长度约1400m)

SEMI-AUTO LEADER TABLE WITH RIBBON SAVING SETTING

半自动带头架带省色带功能设置

BLADE HOLDER QTY 25sets

刀座标配25把

POWER Three Phase,380V/220V, 50~60Hz

电源 三相380V/220V, 50~60Hz

MAIN ENGINE POWER 5KW

功率5KW

AIR PRESSURE 0.6~0.8MPa

气压0.6~0.8MPa

MACHINE SIZE 2400*2240*1660mm

尺寸2400*2240*1660mm



DESCRIPTION详细描述:

JUMBO ROLL WIDTH 650mm~1050mm

大卷宽度650mm~1050mm

JUMBO ROLL DIAMETER 650mm in max.

大卷最大直径650mm

JUMBO ROLL CORE DIA 6inch/3inch

大卷纸芯内径6英寸或3英寸

MAX. SPEED 350m/min

最大速度350m/min

FILM THICKNESS 4~20um

适合薄膜厚度4~20um

FINISHED ROLL SIZE 1inch/ 1/2inch

成品规格一英寸/半英寸纸芯

FINISHED ROLL DIA 135mm(in around 1800m length)

成品最大外径135mm(碳带长度约1800m)

MANUAL LEADER TABLE

手动带头架

BLADE HOLDER QTY 25sets

刀座标配25把

POWER Three Phase,380V/220V, 50~60Hz

电源 三相380V/220V, 50~60Hz

MAIN ENGINE POWER 7KW

功率7KW

AIR PRESSURE 0.6~0.8MPa

气压0.6~0.8MPa

MACHINE SIZE 2360*2110*1700mm

尺寸2360*2110*1700mm



DESCRIPTION详细描述:

JUMBO ROLL WIDTH 650mm~1050mm

大卷宽度650mm~1050mm

JUMBO ROLL DIAMETER 650mm in max.

大卷最大直径650mm

JUMBO ROLL CORE DIA 6inch/3inch

大卷纸芯内径6英寸或3英寸

MAX. SPEED 350m/min

最大速度350m/min

FILM THICKNESS 4~20um

适合薄膜厚度4~20um

FINISHED ROLL SIZE 1inch/ 1/2inch

成品规格一英寸/半英寸纸芯

FINISHED ROLL DIA 135mm(in around 1800m length)

成品最大外径135mm(碳带长度约1800m)

SEMI-AUTO LEADER TABLE WITH RIBBON SAVING SETTING

半自动带头架带省色带功能设置

BLADE HOLDER QTY 25sets

刀座标配25把

POWER Three Phase,380V/220V, 50~60Hz

电源 三相380V/220V, 50~60Hz

MAIN ENGINE POWER 7KW

功率7KW

AIR PRESSURE 0.6~0.8MPa

气压0.6~0.8MPa

MACHINE SIZE 2500*2110*1700mm

尺寸2500*2110*1700mm



DESCRIPTION详细描述:

JUMBO ROLL WIDTH 650mm~1050mm

大卷宽度650mm~1050mm

JUMBO ROLL DIAMETER 650mm in max.

大卷最大直径650mm

JUMBO ROLL CORE DIA 6inch/3inch

大卷纸芯内径6英寸或3英寸

MAX. SPEED 400m/min

最大速度400m/min

FILM THICKNESS 4~20um

适合薄膜厚度4~20um

FINISHED ROLL SIZE 1inch/ 1/2inch

成品规格一英寸/半英寸纸芯

FINISHED ROLL DIA 135mm(in around 1800m length)

成品最大外径135mm(碳带长度约1800m)

AUTOMATIC LEADER TABLE WITH RIBBON SAVING SETTING

全自动带头架带省色带功能设置

BLADE HOLDER QTY 25sets

刀座标配25把

POWER Three Phase,380V/220V, 50~60Hz

电源 三相380V/220V, 50~60Hz

MAIN ENGINE POWER 8KW

功率8KW

AIR PRESSURE 0.6~0.8MPa

气压0.6~0.8MPa

MACHINE SIZE 2700*2400*1700mm

尺寸2700*2400*1700mm



DESCRIPTION详细描述:

JUMBO ROLL WIDTH 650mm~1050mm

大卷宽度650mm~1050mm

JUMBO ROLL DIAMETER 650mm in max.

大卷最大直径650mm

JUMBO ROLL CORE DIA 6inch/3inch

大卷纸芯内径6英寸或3英寸

MAX. SPEED 400m/min / 450m/min

最大速度400m/min / 450m/min

FILM THICKNESS 4~20um

适合薄膜厚度4~20um

FINISHED ROLL SIZE 1inch/ 1/2inch

成品规格一英寸/半英寸纸芯

FINISHED ROLL DIA 135mm(in around 1800m length)

成品最大外径135mm(碳带长度约1800m)

AUTOMATIC LEADER TABLE

全自动带头架

BLADE HOLDER QTY 25sets

刀座标配25把

POWER Three Phase 380V/220V, 50~60Hz

电源 三相380V/220V, 50~60Hz

MAIN ENGINE POWER 8KW

功率8KW

AIR PRESSURE 0.6~0.8MPa

气压0.6~0.8MPa

MACHINE SIZE 3100*2400*1700mm

尺寸3100*2400*1700mm



DESCRIPTION详细描述:

Jumbo width within 230mm

大卷最大宽度230mm

Jumbo core in 1 inch/ 1/2inch ,

大卷内径一英寸，半英寸

Jumbo diameter max.in 120mm

大卷最大直径120mm

SIEMENS INVERTER

西门子变频器

For film thickness from 4~20um

适合薄膜厚度4~20um

2rewinding shafts system

双轴收卷系统

3pcs 1inch solid shaft ;3pcs 1/2inch solid shaft

标准配置一英寸光轴、半英寸光轴各3支

Blade holder in 5pcs(standard simple blade holder)

普通刀座5把

Finished rolls in around 1400m(120mm in diameter)

成品碳带长度1400m(成品外径120mm)

Max.Speed in 100m/min

最大速度100m/min

Mini waste ribbon sucking system

迷你真空吸废设置

Tension controlled by air pressure

气动张力控制模式

Power: Single phase 220v, 50~60Hz

单相电源220V 50~60Hz

Air pressure 0.6~0.8MPa

气压 0.6~0.8MPa

Size around 650*450*450mm

尺寸650*450*450mm

N.W. around 55kgs

重量55公斤



德力实
DELISH

MINI SLITTER 350MM 迷你分切机350



DESCRIPTION详细描述:

Jumbo width within 330mm

大卷最大宽度330mm

Jumbo core in 1 inch/ 1/2inch

大卷纸芯内径一英寸，半英寸

Jumbo diameter max.in 120mm

大卷最大直径120mm

SIEMENS INVERTER

西门子变频器

For film thickness from 4-20um

适合薄膜厚度4-20um

2 rewinding shafts system

双轴收卷系统

3pcs 1inch solid shaft ;3pcs 1/2inch solid shaft

标准配置一英寸光轴、半英寸光轴各3支

Blade holder in 5pcs(standard simple blade holder)

普通刀座5把

Finished rolls in around 1400m(120mm in diameter)

成品碳带长度1400m(成品外径120mm)

Max.Speed in 100m/min

最大速度100m/min

Mini waste ribbon sucking system

迷你真空吸废设置

Tension controlled by air pressure

气动张力控制模式

Power: Single phase 220v, 50-60Hz

单相电源220V 50~60Hz

Air pressure 0.6~0.8MPa


气压 0.6~0.8MPa

Size around 750*450*450mm

尺寸750*450*450mm

N.W. around 65kgs

重量65公斤

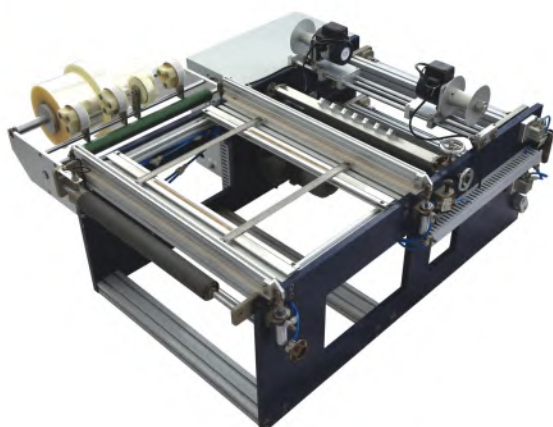

DESCRIPTION详细描述:

Jumbo width within 450mm
大卷最大宽度450mm
Jumbo core in 1inch, 1/2inch or 3inch if required
大卷纸芯内径一英寸, 半英寸; 可定制三英寸
Jumbo diameter max.in 300mm
大卷最大直径300mm
SIEMENS INVERTER
西门子变频器
For film thickness from 4~20um
适合薄膜厚度4~20um
4 rewinding shafts system
四轴收卷系统
5pcs 1inch solid shaft ;5pcs 1/2inch solid shaft
标准配置一英寸光轴、半英寸光轴各5支
Blade holder in 5pcs(standard simple blade holder)
普通刀座5把
Finished rolls in around 1000m(100mm in diameter)
成品碳带长度1000m(成品外径100mm)
Max.Speed in 100m/min
最大速度100m/min
Small Leader station
迷你带头架设计
Mini waste ribbon winding motor system
电机卷废设置
Tension controlled by air pressure
气动张力控制模式
Power: Single phase, 220v, 50~60Hz
单相电源220V 50~60Hz
Air pressure 0.6~0.8MPa
气压 0.6~0.8MPa
Size around 1300*1120*650mm
尺寸1300*1120*650mm
N.W. around 150kgs
净重150公斤



DESCRIPTION详细描述:

SIEMENS Touch screen, SIEMENS PLC
显示屏 /PLC 均用SIEMENS

SANYO servo motor for rewinding
收卷上下电机为SANYO 伺服电机组

Jumbo width within 450mm

大卷最大宽度450mm

Jumbo core in 1 inch or 3 inch if required

大卷纸芯内径一英寸，可定制三英寸

Jumbo diameter max. in 300mm

最大直径300mm

Finished rolls in around 50m

(12mm in diameter, 1/2 inch and 1 inch can customize if required)

成品尺寸 12mm*50m

(如果需要增加1寸半成品，请另外定制)

4 rewinding shafts system

四轴收卷系统

4 pcs 7.2mm solid shaft; 1pcs 1 inch unwinding shaft

4根特别定制铁轴直径7.2mm ;1根开卷气轴1英寸

Blade holder 40pcs

定制刀隔块为 40pcs

Speed in 30-80m/min (max. Speed 150m/min for 1 inch rewinding shaft)

速度建议30-80米/分 (1寸收卷速度可达150m/min)

Small Leader station

迷你带头架设计

Tension controlled by servo motor

伺服张力控制

Power: Single phase 220v, 50-60Hz

单相电源220V, 50~60Hz

Air pressure 0.6~0.8MPa

气压 0.6~0.8MPa

Size : 1890*1450*1320mm

尺寸1890*1450*1320mm

N.W. around 180kgs

净重180公斤



AUTO CORE CUTTER 全自动切管机 **DESCRIPTION详细描述:**

Suit for core size 1/2", 1" and 3"
(if need other diameter, add rollers)
适合纸管尺寸半英寸，一英寸或三英寸
(可根据需要定制不同尺寸的轴)

Core length Max.1500mm
纸管最大长度1500mm

Speed 2seconds/pc for 1/2" or 1";
5 seconds/pc for 3"
分切速度2秒/支(一英寸/半英寸纸管);
5秒/支 (3英寸纸管)

Siemens PLC/ Touch screen
西门子PLC/显示器

Sanyo server motor for main driver
主电机采用山洋伺服电机
the other motor in common China motor
其他为国产电机

Power Single phase,220v, 50~60Hz
单相电源220V 50~60Hz

Air pressure 0.6~0.8MPa
气压 0.6~0.8MPa

Size: 2255*720*1150mm
机器尺寸: 2255*720*1150mm

Weight: around 300kgs
重量: 300kgs





MANUAL CORE CUTTER 手动切管机

DESCRIPTION详细描述:

Power by: Single Phase 220V, 50~60Hz

电源单相电源220V 50~60Hz

Air pressure in: 0.6~0.8MPa

气压0.6~0.8Mpa

Core size: 1" or 1/2"

适合纸芯规格一英寸或半英寸

Speed: 5seconds/pc

速度5秒/支

Knife diameter: 100mm

刀片直径100mm

Machine Size: 700*500*790mm

尺寸: 700*500*790mm

PAPER CORE NOTCH PUNCHER 冲孔机

DESCRIPTION详细描述:

Air pressure in 0.6 ~ 0.8MPa

气压 0.6~0.8Mpa

It is for 1inch and 1/2inch paper core notch cutting, it can be used for other size paper core if required.

用于一英寸和半英寸纸芯的冲孔，也可定做为其他规格纸芯的冲孔

Pneumatic element by AIRTAC which is with high quality assurance

冲孔机气动元件采用亚德客气动件，以及导轨滑块

等元件，保证动作可靠，耐冲击力强

Protection cover helps to avoid the accidental hurts for operator

设计有保护盖板，可防止意外损伤

With free cutter mould: 2 pcs each for 1inch and half inch

一英寸及半英寸刀膜各配两个

With free knives: 20pcs


冲刀配20把

Size 720*210*360mm

尺寸 720*210*360mm

Weight 26kgs


重量 26kgs

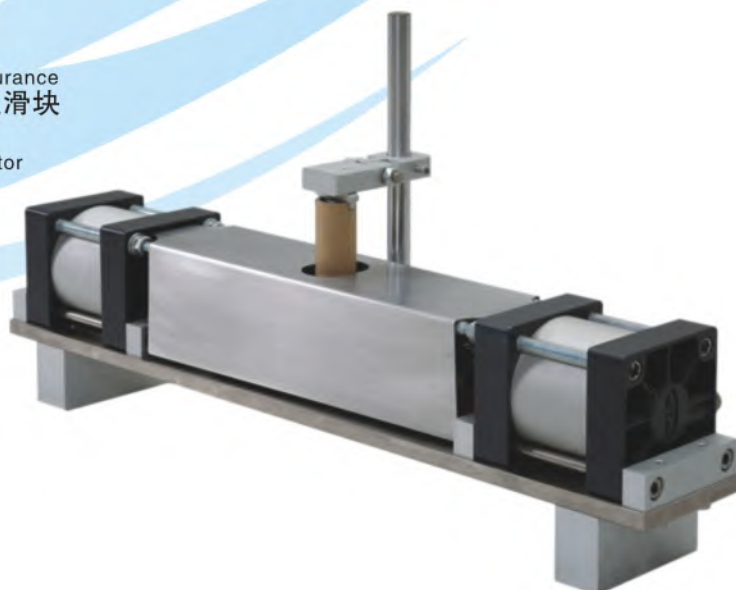



德力实
DELISH

HELPING MACHINES 配套小机器系列

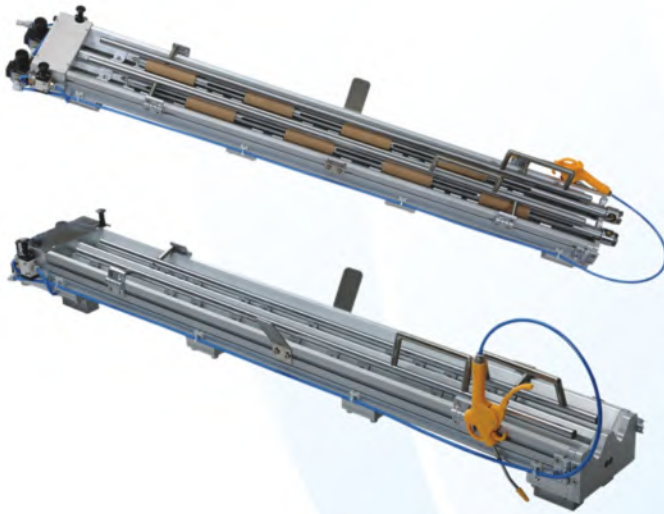

CORE LOADING MACHINE 装管机

DESCRIPTION 详细描述:

Air pressure in 0.6 ~ 0.8MPa

气压 0.6~0.8Mpa

It is used for loading paper cores on 1inch and 1/2inch air shaft

用于一英寸和半英寸气轴的上管

Pneumatic element by AIRTAC which is with high quality assurance

装管机气动元件采用亚德客气动件

Position block: 24pcs,width 16mm/25mm

固定块24个, 宽度16mm/25mm

Size 1390*220*180mm

尺寸 1390*220*180mm

Weight 25kgs

重量 25kgs

MINI TROLLEY 迷你叉车

DESCRIPTION 详细描述:

Hydraulic mini trolley for weight 400kgs

For loading and unloading Jumbo Roll

液压迷你手推车 载重400kgs

可用于装卸大卷

Size 990*620*1370mm

尺寸 990*620*1370mm

MAX Dump Height 1100mm

最高高度 1100mm





以改变 应万变
Changing to Meet Change



DELISH AUTOMATION EQUIPMENT CO.,LTD
厦门德力实自动化设备有限公司

地址Add: 1st Floor West, No.1305, South Tonghui Road,
Tongan Industrial Clusters, Xiamen, China

电话Tel: 0086-592-7160-660/500

传真Fax: 0086-592-7235828

邮箱Email: fionchen@delishmachine.com

sales1@delishmachine.com

sales2@delishmachine.com

网址Web: www.delishmachine.com